

ATTENTION:

Sourcewell Quote Valid for 60 Days

Reference No: 248062MGW

Ship To:
 City of Arcata

Phone:
 FAX:

Bill to:
 City of Arcata

Customer Unit/Stock:
 Phone:
 FAX:

PO#
Quote Date 04/10/2023
Order Date
Order Status Quote

Sales Person Michael Wilwerding
Sourcewell Discount 12%
Addtl Disc/Terms 0%
 Net Due 30 Days

Appx Completion Other Charge **78 (weeks)**
 Dealer Off-Load, Set Up, and Doc Fees
Product ID FT-40-2 LP Deck Over - Ramp
Serial No

Shipping Notes:

Drawing No: OVL Length: 35

Notes: City of Arcata Member# 2093 / Contact: Scott Lackey @ slackey@cityofarcata.org /Sourcewell - Contract #092922-FTS / QREF# 34436

Copy No:
 Part No:
 MRP No:
 Smart No: 5.32335
 Appx Wgt +/-: 9,700 lbs

Item Type	Options	Description	Add Qty	Unit	Total Qty	Total Amt
Base Trailer		FT-40-2 LP		Each	0	\$30,447.00
Deck Length	✓	Add Deck Length	3	Opt	23	\$1,623.00
Frame Type		Engineered Fabricated Hi-Tensile Grade 80 Main Frame Beams with Grade 80 Jr-I Cross-Members		Std	1	\$0.00
Beavertail	✓	Wood Inlaid Beavertail (ILO Self Cleaning Angle Iron)		Feet	5	\$138.00
Beavertail, Acc	✓	Double Incline		Opt	1	\$384.00
Deck Type		White Oak 2" Nom		Std	1	\$0.00
Ramps; Rear	✓	6' X 45" Plus Tapered Approach (81" OAL) Wood Inlaid, Air Operated w/Bolt on Legs		Pair	1	\$4,579.00
Ramps, Acc	✓	Additional Large Air Tank - For Air Ramps		Opt	1	\$330.00
Ramps, Acc	✓	Safety Chains for ramps in transport position		Pair	1	\$82.00
Appx Deck Height		33" Loaded, 35" Unloaded		Inches	1	\$0.00
Width		102" OD	3	Feet	28	\$0.00
Tie Downs	✓	D-Rings, 1" ** Straight ** (One Set Centered on BVT)	2	Each	14	\$100.00
Tie Downs	✓	**Custom**- Rub Rail & Stake Pockets First 5' Of Main Deck To Accept Attachment Rack		Opt	5	\$474.00
Brakes		Air, ABS 2S/1M, Meritor WABCO (Parking brakes on all axles)		Std	1	\$0.00
Axles		25K Oil Bath		Std	2	\$0.00
Suspension		49" Spread (Spring), 9700 Hutch		Std	1	\$0.00
Tires & Wheels	✓	235/75R 17.5 J, 8 Bolt [17.5 x 6.75] Hub Pilot		Each	8	\$728.00
Hitch Length		Center of Coupler to Headboard, Appx		Std	5.3	\$0.00
Hitch Type		3" Adjustable Lunette Eye/Pintle, [C] 66,000 lb Plate Mount (3/4" Bolt)		Std	1	\$0.00
Jack	✓	140,000 lb Twin 2 Speed (39,000 lb Lift Capacity)		Pair	1	\$484.00
Plug		7 Pole Semi		Each	1	\$0.00
Lights		LED Lights (Peterson), Sealed Wiring Harness (Sealco)		Std	1	\$0.00
Trailer Color		Felling Black # CCA945378 (White Felling Decal)		Std	1	\$0.00
Stripe Color		White		Std	1	\$0.00
Standard		Toolbox, with Lockable Cover		Std	1	\$0.00
Standard		2 Steps, 1 on the Standard Hitch and 1 in front of Axles on Roadside		Std	2	\$0.00

Item Type	Options	Description	Add Qty	Unit	Total Qty	Total Amt
Standard		1/2" Safety Chains, Grade 70		Std	1	\$0.00
Standard		Document Holder		Std	1	\$0.00
Option	✓	Printed Owner's Manual		Opt	1	\$0.00
Option	✓	**Custom** - Attachment Rack (Removable)-54" Deck height, full width of deck (ID of uprights is OD of stationary), angle lip up w/rub & stake front and sides (Black w/std decking unless otherwise optioned) **2,500 lb Max Capacity*		Feet	5	\$3,264.00
GVWR	✓	49,200 lbs		Opt	1	\$0.00



**MSO's are not released until
 Payment Received**



****FOB IF NO FREIGHT charged****

** FET Tax may apply on 26,000 lb GVWR
 and above **

**State and Local taxes may not be
 reflected in quoted price**

Standard List Price:	\$42,633.00
Sourcewell Discount:	\$5,115.96
Sub Total:	\$37,517.04
Net Cost:	\$37,517.04

Please sign and date your acceptance of this quote:

Sourcewell Freight:	\$4,347.00
Material Surcharge:	\$0.00
Other Charge (see above):	\$899.00
Sales Tax:	\$3,656.11
License Fees:	\$250.00
FET TAX (Less Tire Deduct):	\$4,502.04
TOTAL U.S.D.	\$50,982.15



Jul 14, 2023

CITY OF ARCATA
PUBLIC WORKS-ATT MEGAN
736 F STREET
ARCATA
California
95521

Attention: NICK PURCELL

RE: Quote 217164-01

Dear Sir,

We would like to thank you for your interest in our company and our products. We are pleased to quote the following for your consideration.

One (1) New Caterpillar Model: CB2.7-MB Paving and Compaction

MACHINE SPECIFICATIONS

CB2.7 03A UTILITY COMPACTOR	543-2140
Double drum vibratory compactor with 1200 mm (47") drum width	
LANE 2 ORDER	0P-9002
ENGINE, CAT C1.7T	621-4038
LIGHTS, WORKING, LED	568-5154
SWITCH, BATTERY DISCONNECT	565-3708
SEAT, WITH SAFETY SWITCH	573-5962
SUPPORT, SLIDING FOR SEAT	364-2279
SEAT BELT, 3"	542-6995
ROPS, FOLDABLE, LOCKABLE	574-6088
TRAVEL CONTROL, COVER	432-8451
PRODUCT LINK, CELLULAR PL243	577-1414
PLUG (NON SINGLE LIFT)	503-1603
PLUG (NO GUARDS, BUMPER)	569-8105
DRUM SCRAPER, FIXED	603-5914
OIL, HYD, STANDARD	574-6039
INSTRUCTIONS, ANSI	574-6030
SERIALIZED TECHNICAL MEDIA KIT	421-8926
CONTROL, TRACTION	561-3543
LIGHT, BEACON, CANOPY	625-9038

MATS, COCOA
CANOPY, FLD
ROLL ON-ROLL OFF

456-9432
600-9428
0G-0044

STANDARD EQUIPMENT

POWERTRAIN -CAT inline three-cylinder diesel engine -with glow-plug heater -Fuel filter/water separator/electronic -priming pump and electronic water -indicator -Dual element air cleaner with dust -ejection -Hydrostatic transmission -Service and parking brakes - spring -applied hydraulically released

ELECTRICAL -Engine start switch with auto preheat -12-volt starting and charging system -85-ampere alternator -Maintenance free battery -Backup alarm and front facing warning -horn -Product Link ready -Beacon ready

OPERATOR ENVIRONMENT -Gauge Cluster: --Fuel level gauge --Hour meter --Engine Coolant Temperature Gauge -Emergency stop switch -Operator warning system indicators: --Parking brake engaged --Hydraulic oil temperature high --Engine oil low pressure --Electrical system voltage low --Low fuel --Engine preheat --High/low vibrate frequency --Beacon status -Lockable, vandalism guard for -instrument panel -Travel control, single lever -Retractable seatbelt -2 platform handrails / single guardrail -Steering wheel spinner -12-volt power point -Sealed storage compartment -Isolated operator platform -Vibration reducing, diesel resistant -rubber floormat -

DRUMS -Two smooth drums: 1200 mm (47") -wide x 720 mm (28") diameter -Single amplitude with dual frequency -vibratory system -Pressurized drum watering system with -selectable continuous or intermittent -flow -

FLUIDS -Premixed 50% concentration of extended -life coolant with freeze protection -to -37C (-35F) -

OTHER STANDARD EQUIPMENT -Lockable engine enclosure with safety -hold open latch -Sealed for life hitch bearings -Sight gauges: --Hydraulic tank level --Engine Coolant -Lockable hydraulic tank cap -Articulated frame with safety lock -3 point hitch -4 transport tie-down and 4 lift points -Quick connect hydraulic pressure -test ports + 1 SOS port -Caterpillar o-ring face-seals couplings -Offset hitch with 50 mm (2") of -manual adjustment -Ecology drains: --Hydraulic Tank --Radiator --Engine Oil -

SELL PRICE	\$69,636.88
SOURCEWELL MEMBER DISCOUNT AT 19 % OF CAT CONTENT	(\$6,634.87)
NET BALANCE DUE	\$69,636.88
SALES TAX (8.5%)	\$5,919.14
AFTER TAX BALANCE	\$75,556.02

WARRANTY

Standard Warranty: 12 Month, Unlimited Hours Standard Warranty

F.O.B/TERMS: Arcata

ADDITIONAL CONSIDERATIONS

- Quoted as per Sourcewell Contract# 032119-CAT

Accepted by _____ on _____

Signature

This Quote is valid for 30 days, after which time we reserve the right to re-quote. If there are any questions, please do not hesitate to contact me.

Sincerely,

Mathew Durflinger
Machine Sales Representative
Peterson CAT
(510) 254-1203
MDDurflinger@petersoncat.com



Date: July 11, 2023

Quotation for City of Arcata

Quote No:637105-00

Prepared For: Nick Purcell	Quote No: 637105-00
City of Arcata	iQuote No: 130117
736 F STREET	Sales Person: Tim McCoy
ARCATA, CA 95521	tim.mccoy@turfstar.com (916) 709-7124

Summary

Configuration Name	Qty	Unit Price	Sub Total	Sales Tax	Total
010- HR 3 pt. LELY BROACASTER	1	\$4,797.00	\$4,797.00	\$407.77	\$5,204.77
Totals:			\$4,797.00	\$407.77	\$5,204.77



Date: July 11, 2023

Quotation for City of Arcata

Quote No:637105-00

Configuration Product Details 010- HR 3 pt. LELY BROADCASTER

Model	Product Description	Qty	Unit Price	Extended	Sales Tax	Total
HR	LELY BROADCASTER	1	\$4,497.00	\$4,497.00	\$382.25	\$4,879.25
FSD1	Setup	1	\$150.00	\$150.00	\$12.76	\$162.76
FSD2	Delivery	1	\$150.00	\$150.00	\$12.76	\$162.76
Totals:						\$5,204.77

Sales Tax (8.5%) = \$442.41

Total = \$5,647.18



Date: July 11, 2023

Quotation for City of Arcata

Quote No:637105-00

Standard Terms and Conditions

Prices including all finance options are subject to change based on Turf Star Western's receipt of product and estimated shipments. Currently, product availability is a minimum of 6-18 months. Your Final Price will be determined at time of shipment. Delivery is FOB point of origin unless otherwise stated.

Office Locations

Northern California:

3928 N.Blattela Lane
Fresno, CA 93727
Fax: (559) 277-7123

2438 Radley Court
Hayward, CA 94545
Fax: (510) 785-3576

11373 Sunrise Gold Circle
Rancho Cordova, CA 95742
Fax: (800) 241-1997

Southern California:

79-253 Country Club Drive
Bermuda Dunes, CA 92203
Fax: (760) 345-4297

955 Beacon Street
Brea, CA 92821
Fax: (800) 775-8873

2110 La Mirada Ste 100
Vista, CA 92083
Fax: (760) 734-4285

Pacific Northwest:

1750 Industrial Dr.NE
Salem, OR 97301
Ph: (503) 691-0250

5869 South 194th
Kent, WA 98032
Fax: (253) 872-6942

2824 East Garland
Spokane, WA 99207
Fax: (509) 483-7563



WARNING:

Cancer and Reproductive Harm-<http://www.P65Warnings.ca.gov>
For more information, please visit <http://www.tcoCAProp65.com>

CALIFORNIA SPARK ARRESTER WARNING

Operation of this equipment in the State of California may create sparks that can start fires around dry vegetation. A spark arrester may be required. The operator should contact local fire agencies for laws or regulations relating to fire prevention requirements.

LELY

Broadcast Spreaders



Accuracy and Dependability



www.lelyturf.com

partners in turfcare



Unmatched in versatility and dependability

Lely broadcast spreaders are the world's most popular machines used today.

- World famous Force Feed Spreading Mechanism
- Unique Lely spreading pattern of sloping towards the outside
- Unequaled spreading accuracy up to 52 feet wide (16 meters)
- 3-point hitch mounted (Cat. 1, 2), PTO operated and ground driven
- Oil bath gearbox standard on all spreaders

These precision single-disc fertilizer spreaders excel because of their accurate broadcasting of fertilizer, seed, granular chemicals and sand. This unique system of spreading has created many satisfied customers throughout the world. Lely broadcasters are easy to operate, easy to clean and provide years of service. They are dependable, we stand behind every spreader with a 2-year limited warranty.

The unique Lely spreading system

The Feeding is key to the precise metering of any material, regardless of shape and density. Lely fertilizer spreaders are unrivaled because of their outstanding accuracy of material spread to the center or side. The bottom plate carries the fertilizer in a rotating movement. As a result, the fertilizer material is pushed past the feeding openings.

Available in 3 sizes:


- Small Seed – Turf Seeds, Grains
- Standard – Fertilizer, Lime & General Use
- Mass Output – Sand/Salt

A remote mechanical rope on/off control is standard equipment for Lely's single-disc spreaders. A hydraulic remote control option is available. All of Lely's single-disc spreaders are equipped with a simple, adjustable device for spreading to just one side.


Dynamic design

The 33" diameter Ejector Disc is the hub of the world-famous Forced Feed Spreading Mechanism. Extensive research was conducted and resulted in the special size of the ejector disc with the long spoons.

- The dynamically-designed ejector disc, ensures an accurate spreading pattern up to 52'
- The Disc rotates over 2,000 times per minute
- Spoons made of stainless steel work in conjunction with the feeding assembly



Full Width



One Side

Spreading System

The spreading pattern adjustment plate, with section indication, provides a variety of settings for maintaining simple operation.



Dynamic design

The six dynamically-designed spoons direct a metered quantity of material to the field. A constant and precise material feeding from the disc to the spoons are ensured.



WFR/WGR

Land wheel driven, the W broadcast spreader utilizes the same patented ejector disc technology as all PTO units. A unique wheel gear system lets the tires drive independently for uniform application, even on turns!

- Hopper capacity of 800 lbs/350 kgs
- Forward speed of 4.5 mph/7.2 km/h gives an effective spreading width of 52'/(16m)
- Disengagement for towing, remote rope feed control and side spreading adjustment is standard

The spreader is used for spreading fertilizer on golf courses, sports fields, parks or green areas. It is accurate for the application of lime, turf seed, grains and sand. Land wheels are fitted with tractor profile (WGR), or lawn flotation (WFR shown) tires.

Sand and salt

This trailed broadcast spreader can also do an excellent job spreading sand (top dressing) or salt (snow and ice). For sand/salt, a special ejector disc with short spoons gives a spreading width of up to 18' (6 m).

HR

Well known throughout the world, the model H has a long history in the family of Lely broadcast fertilizer spreaders. It is relatively small for those who require it.

- 3-point hitch and PTO driven
- Hopper capacity of 800 lbs/350 kgs
- Accurate for up to 52'/(16m) center or side applications

One latch releases the hopper so all moving parts can be easily cleaned. An optional hopper extension increases capacity by 200 lbs/90kgs.



Easy to clean

All Lely broadcast spreaders have hoppers that can be removed or tilted up by one or two latches. This makes for easy and quick cleaning of the critical feeding assembly area and ejector disk. This ensures a long life for your spreader.

L1250

The L1250 is ideally suited for somewhat larger applications. Not just fertilizers, but lime, turf seeds and grains can also be spread with this type of spreader.

- Mounted by 3 point hitch / PTO driven, Class I or II
- Hopper capacity of 1,323 lbs/625 kgs of material
- Will handle bulk bagged fertilizers

Changing the feeding assembly is quick and easy because of the hopper pivots. For sand top dressing, a mass feeding assembly option is available.

L1500

Lely's L1500 fertilizer spreader was developed specifically for larger turf areas. It is perfect for applying fertilizers or granular chemicals in bulk, either from bulk bags, a tipping trailer or from a silo.

- 3-point hitch and easy attach PTO drive, Class II
- Capacity of 1,650 lbs/775 kgs
- Low center of gravity and profile

The hopper can be tilted backward by unhooking two simple latches on the side. This enables the spreading mechanism to be cleaned very quickly and easily.

L2010

The largest in the range of single-disc fertilizer spreaders from Lely, the L2010 is particularly suitable for large turf operations, holding one ton of material.

- 3-point hitch and easy attach PTO drive, Class II
- Capacity of 2,275 lbs/1,000 kgs
- Dump type hopper with 2 latches for easy cleaning

The feed assembly can be adjusted by means of a graduated scale. This allows the amount of spread to be accurately regulated. This spreader will go anywhere your tractor goes.




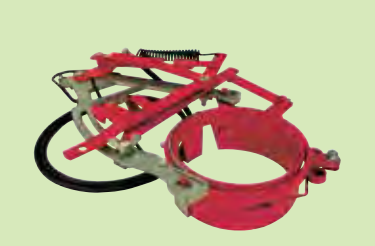
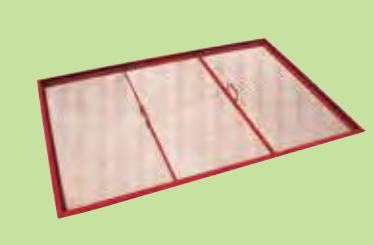





L Carrier

Pulling a spreader is a benefit in wet conditions, because the risk of soil structure damage by tractor wheeling can be virtually eliminated. Two 11L x 15 tires come standard. A flotation tire option is available (shown).

- Converts both the L1500 and the L2010 to a trailer broadcast spreader
- Fertilizer, chemical or topdressing spreading can be carried out with smaller tractors

The spreader is PTO-driven, remote rope control feeding and side-spreading, thus retaining all the advantages of a 3-point machine.



<p>Standard Ejector Disc</p> <p>The 33" (84 cm) diameter disc with a winged center directs material through the feeding. The six dynamically-designed, stainless steel spoons supply a metered quantity of material to the field.</p>			<p>Standard Feeding</p> <p>For use with almost all product applications. Provides precise measurement of material regardless of shape and density. Remote rope control for easy open and close action from your seat.</p>
<p>Sand or Salt Ejector Disc</p> <p>The ejector disc is set up with short, stainless steel spoons giving a spreading width of up to 18' (6 m). The trailed WFR or PTO driven single-disc spreaders can do an excellent job spreading sand, salt or both.</p>			<p>Hydraulic Feeding</p> <p>Lets the operator open and close the feeding using a switch connected to the tractor's hydraulic system. This ensures proper application rates when turning around or moving to a new location.</p>
<p>Mesh Grid H Screen</p> <p>For use on the HR, WFR and L1250 models, the screen prohibits solid masses of material from entering the feeding area and clogging the system. A larger size is available for the L1500 & L2010.</p>			<p>Mass Feeding</p> <p>Mass output feeding for application of sand, salt or any volume application. For use on all models.</p>
<p>Spreader Covers</p> <p>Available on all models. Keep fertilizer from bouncing out onto the turf. Keep light moisture off fertilizer during brief showers. Made of nylon pack and urethane has an elastic fit and viewing window.</p>			<p>Hopper Extension</p> <p>Used on the H and W series of spreaders. The extension increases hopper capacity by approximately 200 lbs (91 kgs).</p>
<p>Turf Marker</p> <p>A foam marking system designed to keep accurate track of overlap while doing long runs of product application. Comes complete as shown.</p>			<p>Agitator</p> <p>Available on all models, the agitator aids in the spreading of powdery/clumpy fertilizers, lime or sand. The agitator eliminates the risk of material bridging.</p>

2-Year Limited Warranty

Lely USA, Inc. stands behind its products. We are so confident in the quality and craftsmanship of our fertilizer spreaders that a 2-YEAR LIMITED WARRANTY comes standard.

Lely warrants all single disc broadcast spreaders for a period of two years from the date delivered to the original purchaser against defective materials and/or workmanship.

Any part, or parts, of the equipment that in the company's judgment shows evidence of such defects, will be repaired or replaced as the company elects, without charge for parts and labor if the defect appears within the stated time.

Contact Lely USA, Inc. for full details and restrictions of this warranty.



WFR

HR

L1250

L1500

L2010

Known worldwide for accuracy and dependability

Unmatched in versatility and dependability, Lely broadcast spreaders meet the demanding needs of turf management professionals around the globe. All Lely precision single-disc fertilizer spreaders excel because they deliver precision accuracy, are easy to operate and easy to clean. Plus, every Lely spreader is covered by a 2-year limited warranty. Upgrade your equipment for your next applications.

SINGLE-DISC BROADCAST SPREADER TECHNICAL SPECIFICATIONS

Model	Type	HOPPER CAPACITY*		Empty Weight	Length	Height	Width	Tire	Maximum Spread Width
		CU. FT.	LBS.						
WFR	Trail, Ground Drive Flotation Tires	11.5	805	428	79"	48"	64"	Flotation 18x9.50x81up	up to 52'
WGR	Trail, Ground Drive Ground Grip Tires	11.5	805	410	79"	49"	50"	Ground 4.00x12	up to 52'
HR	3-pt. hitch p.t.o driven	11.5	805	320	38"	43"	51"	—	up to 52'
1250	3-pt. hitch p.t.o driven	18.9	1,323	375	53"	51"	62"	—	up to 52'
1500	3-pt. hitch p.t.o driven	23.6	1,650	420	50"	44"	77"	—	up to 52'
2010	3-pt. hitch p.t.o driven	32.5	2,275	452	48"	49"	79"	—	up to 52'



Lely USA, Inc.
P.O. Box 437, Pella, Iowa 50219
1-888-245-4684 (U.S.A. only) Fax: 1-800-752-8249

DEALER NETWORK

Lely USA, Inc. has a dealer network to serve you.
To find the dealer nearest you, please go to our website:
www.lelyturf.com Click the Dealer Locator tab.

Equipment shown is for illustrative purpose only and may display optional accessories or components. Lely USA, Inc. reserves the right to make changes in engineering, design, and specifications; add improvements; or discontinue manufacturing at any time without notice or obligation. Copyright © 2017 Lely USA, Inc. All Rights Reserved.